MASTEK SUBSOILER / PANBUSTER SPECIFICATION SHEET

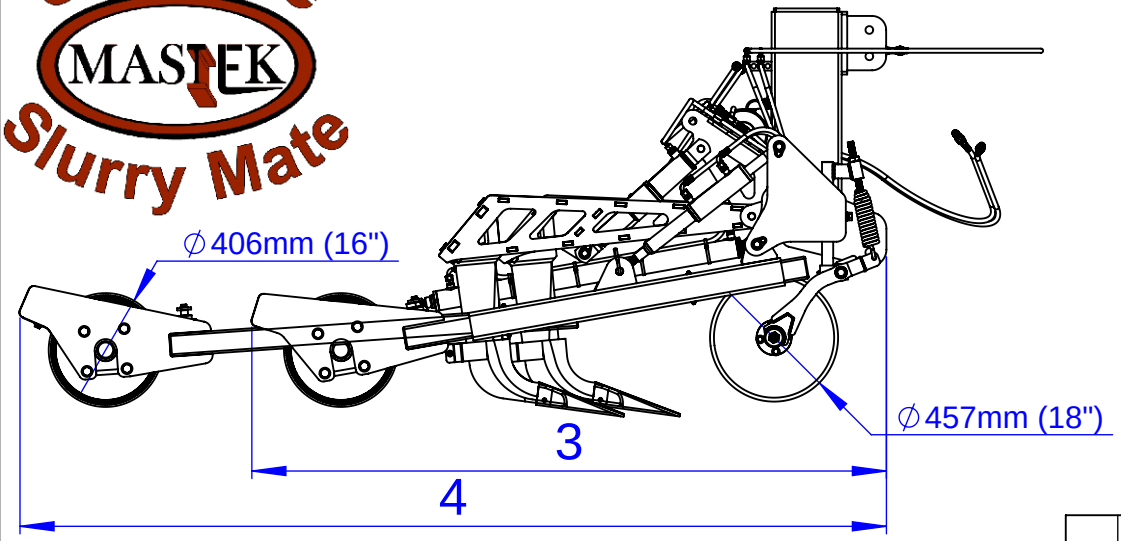

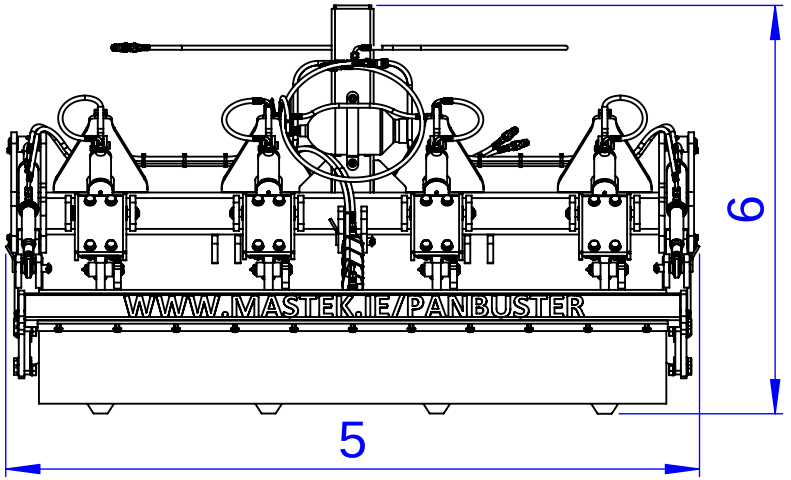

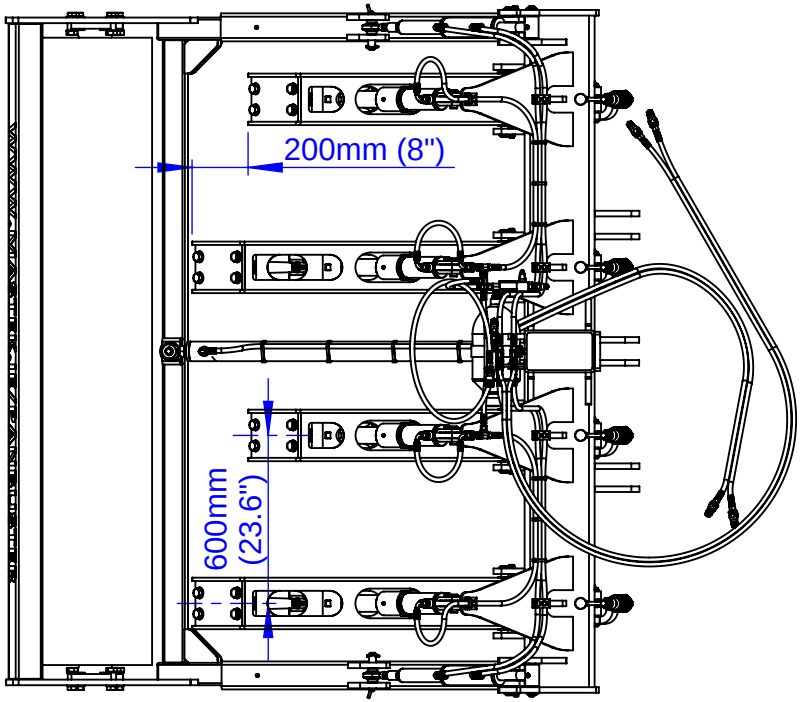

		3 Leg Auto-Reset ***(MSP00300-01)***	4 Leg Auto-Reset ***(MSP00400-01)***	5 Leg Auto-Reset ***(MSP00500-01)***
1.	No. of Legs	3	4	5
2.	Leg Centres	600mm (23.6")	600mm (23.6")	600mm (23.6")
3.	Length (Retracted)	2265mm (89.2")	2265mm (89.2")	2265mm (89.2")
4.	Length (Extended)	3095mm (121.9")	3095mm (121.9")	3095mm (121.9")
5.	Width	1840mm (72.4")	2440mm (96")	3040mm(119.7")
6.	Height	1450mm (57")	1450mm (57")	1450mm (57")
7.	Hydraulic Pressure	30 bar (435 psi)	30 bar (435 psi)	30 bar (435 psi)
8.	Weight	1115 Kg	1350 Kg	1585 Kg
9.	Max. Cutting Depth	508mm (20")	508mm (20")	508mm (20")
10.	Tractor Power Rating @ 350mm Cut Depth	80 Bhp (60 Kw)	105 Bhp (78 Kw)	170 Bhp (127 Kw)

STANDARD FEATURES:

AUTO-RESET LEGS
SPRING LOADED CUTTING DISKS (HEIGHT ADJUSTMENT & VARIABLE TENSION)
REPLACEABLE TOES & SHINS
HYDRAULIC DEPTH CONTROL
HYDRAULIC ROLLER EXTEND/RETRACT
STAGGERED LEGS (200mm)
CAT 2 THREE POINT LINKAGE (ISO/DIS 730)

Mastek Limited *Cootehill Business Park, Cootehill, Co. Cavan, Ireland*
Phone: +353 49 5555 953 *Fax: +353 49 5555 954*
Email: enquiries@mastek.ie *Web: www.mastek.ie*